




FLEXIBLE PERIMETER TRIMS



Excellent solution for finishing ceilings around columns and convex walls, easily cut and curved by hand on site.


Perimeter Trims

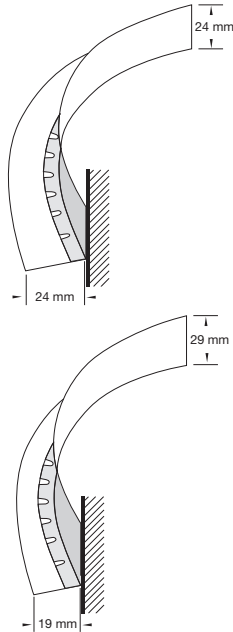

Item Nr.	Dimensions		Content / Carton		Weight / Carton kg	Cartons / Pallet
	length (mm)	height (mm)	pcs	lm		
White						
FT 2424	2500	24	10	25,00	5,50	50
FT 1929	2500	29	10	25,00	5,50	50

Black						
FT 2424 BK	2500	24	10	25,00	5,50	50
FT 1929 BK	2500	29	10	25,00	5,50	50

Accessory



Item Nr.	Description	Dimensions		Content / Carton pcs	Weight / Carton kg
		length (mm)	height (mm)		
A WDN 23 G	Double bent tee bar hanger	57	36	100	2,30

Key Attributes

- Optimum length for most columns with a 2.5 m length
- Easy to cut and to bend to necessary radius
- Available in 2 colours (White and Black)
- 3 ply white PVC tape for a better visual
- Quick fix for columns and convex curves




Physical Data

- **Material**
Steel core with PVC tape
- **Product Family**
Perimeter Trims
- **Coating**
PVC
- **Colour**
Available in Global White and Black.

FLEXIBLE PERIMETER TRIMS


Perimeter Detailing

- 1 The white Flexible trim has **THREE layers** of white PVC coating to avoid the « greyish » visual appearance between the steel supported zone « **G** » and the PVC only zone « **P** ».

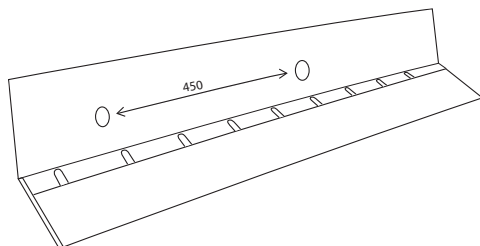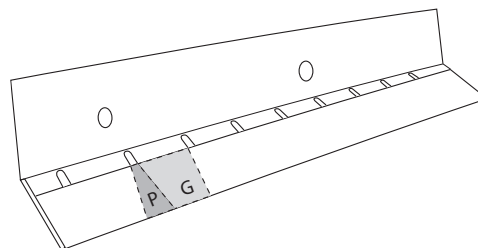


- 2 The Flexible trim should follow the same rule of being fixed onto the wall with 450 mm spacing.

- 3 These trims are considered decorative elements therefore any grid laying on them will need:

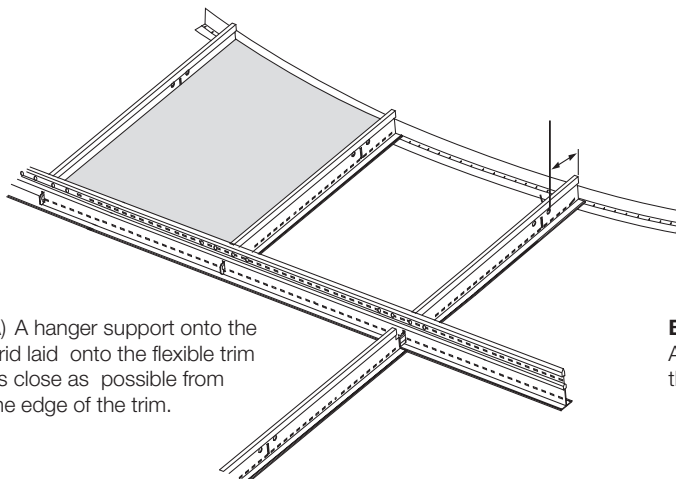

- A)** A hanger support onto the grid laid onto the flexible trim as close as possible from the edge of the trim.

- B)** Use the accessory A WDN 23 G to support the load above the trim.

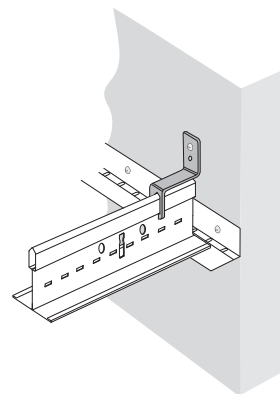

Note:

These trims can be used only in curved TOE OUT (Convex) installations (19 x 29 section must be installed with the 29 mm face vertical).

Minimum bending radius : 200 mm.

Minimum environment temperature during the curving operation : 20°C.

Due to the nature of the PVC coating, these trims do not match exactly our standard black & white colour and gloss.

Fire reaction classification Euroclass F (EN 13501-1) - please check local/country regulations for compliance.

Availability of products may vary according to location.

Please contact our **Armstrong Technical Sales** for further details.

CENTRAL EUROPE SOUTH

(AL/BA/BG/CZ/HR/HU/KO/MD/ME/MK/RO/RS/SK/SI)

Armstrong Building Products

Lighthouse Building

Jankovcova 1569/2c

170 00 Praha 7

Czech Republic

Tel. : +420 234 700 543

e-mail : service-ce@armstrong.com

Czech Republic : www.armstrong.cz

Hungary : www.armstrong.co.hu

Romania : www.armstrong.ro

Serbia : www.armstrong.rs

Slovakia : www.armstrong.sk

Slovenia : www.armstrong.si

www.armstrong.eu